

4CB5-S FILTER CARTRIDGE

DELIVERS QUALITY WATER FOR FOODSERVICE,
VENDING AND OCS APPLICATIONS

4CB5-S Replacement Cartridge: EV9617-26



APPLICATIONS

- ◆ Ideal For Problem Water Areas
- ◆ Foodservice
- ◆ Vending
- ◆ Office Coffee Service (OCS)

FEATURES • BENEFITS

- ◆ Reduces chlorine taste & odor and other offensive contaminants that can adversely affect the taste of water and beverages
- ◆ Sanitary cartridge replacement is simple, quick and clean; internal filter parts are never exposed to handling or contamination
- ◆ Reduces limescale buildup* that can cause excessive machine downtime and increased maintenance costs
- ◆ Carbon block filter finely polishes water for high quality beverage and food applications
- ◆ Reduces extra fine dirt and particles as small as five (5) microns in size by mechanical means*
- ◆ Lowers energy costs by reducing scale*
- ◆ Does not remove fluoride
- ◆ NSF Certified under NSF Standard 42

INSTALLATION TIPS

- ◆ Never use saddle valve for connection.
- ◆ Use 3/8" water line.
- ◆ Install vertically with cartridge hanging down.
- ◆ Allow 2-1/2" (6.35 cm) clearance below the cartridge for easy cartridge replacement.
- ◆ Flush 4CB5-S Cartridge by running water through filter for five (5) minutes at full flow.

OPERATION TIPS

- ◆ Change cartridges on a regular six (6) month preventative maintenance program.
- ◆ Change cartridges when capacity is reached or when pressure falls below 10 psi (0.7 bar).
- ◆ Service flow rate must not exceed 1.67 gpm (6.3 Lpm).
- ◆ Always flush the filter cartridge at time of installation and cartridge change.

SIZING

- ◆ Service Flow Rate: Maximum 1.67 gpm (6.3 Lpm)
- ◆ Rated Capacity: 6.000 gallons (22.710 L)


*As tested by Pentair

4CB5-S FILTER CARTRIDGE

EV9617-26



4CB5-S Replacement Cartridge: EV9617-26

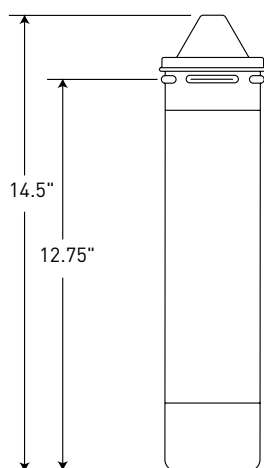

SPECIFICATIONS

- ◆ **Service Flow Rate**
Maximum 1.67 gpm (6.3 Lpm)
- ◆ **Rated Capacity**
6,000 gallons (22,710 L)
- ◆ **Pressure Requirements**
10 - 125 psi (0.7 - 8.6 bar), non-shock
- ◆ **Temperature**
35 - 100°F (2 - 38°C)
- ◆ **Overall Dimensions**
14.5" L x 3.25" D. (36.9 cm x 8.2 cm)



System Tested and Certified by NSF International against NSF/ANSI Standard 42 for the reduction of:

STANDARD NO. 42 – AESTHETIC EFFECTS

Chemical Reduction
Taste & Odor
Chlorine

Pentair trademarks and logos are owned by Pentair plc or its affiliates. For a detailed list of where Pentair trademarks are registered, please visit www.pentair.com/en/registrations.html. Third party registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.

EV9617-26 JL15 ©2021 Pentair Filtration Solutions, LLC. All Rights Reserved.