

4FC FILTER CARTRIDGE

DELIVERS PREMIUM QUALITY WATER FOR FOUNTAIN AND COMBINATION APPLICATIONS

4FC Replacement Cartridge (1 pk): EV9692-21



APPLICATIONS

- ◆ Fountain
- ◆ Combination Systems

FEATURES • BENEFITS

- ◆ Reduces chlorine taste & odor and other offensive contaminants that can adversely affect the taste of beverages
- ◆ Sanitary cartridge replacement is simple, quick and clean; internal filter parts are never exposed to handling or contamination
- ◆ Protects drink system seals, pump, tubing and small orifices from clogging, corrosion and abrasive wear
- ◆ Improves the taste of fountain beverages and helps retain the drink's carbonation
- ◆ Increased capacity for extended reduction of chemical and mechanical contaminants
- ◆ Balanced cartridge for optimum performance in varying water qualities Compatible with Pentair Everpure Coldrink, QC7I, QL2, QL3B, QL3 Heads, and Pentair Everpure High Flow CSR manifolds
- ◆ Proprietary Fibredyne II filtration media effectively inhibits the growth of bacteria on the filter media that can decrease product life
- ◆ Exclusive Fibredyne II media provides superior chlorine taste & odor reduction and micro-filters dirt and particles as small as 0.2* micron in size by mechanical means
- ◆ NSF/ANSI Standard 53 certified to reduce cysts such as Cryptosporidium and Giardia by mechanical means

INSTALLATION TIPS

- ◆ Install vertically so cartridge hangs down.
- ◆ Allow 2½" (6.35 cm) clearance below the cartridge for easy cartridge replacement.
- ◆ Flush filter by running water through filter according to cartridge instructions.

OPERATION TIPS

- ◆ Replace cartridge when flow rate becomes inconveniently slow or before rated capacity is reached. It is recommended to replace cartridge at least once per year.
- ◆ Change cartridges when capacity is reached or when pressure falls below 10 psi (0.7 bar).
- ◆ Always flush the filter cartridge at time of installation and cartridge change.

SIZING

- ◆ Service Flow Rate: 2.5 gpm (9.5 Lpm)
- ◆ Rated Capacity: 15,000 gallons (56,781 L)


**Validated by ISO 17025 accredited lab for 99.999% reduction of Pseudomonas diminuta following the ASTM F838-05 protocol for the validation of 0.2 µm sterilizing grade filters.*

4FC FILTER CARTRIDGE

EV9692-21



4FC Replacement Cartridge (1 pk): EV9692-21

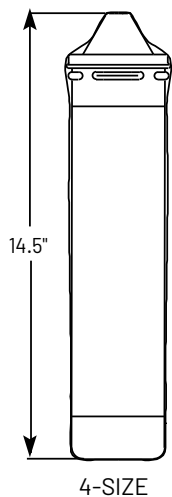

SPECIFICATIONS

- ◆ **Service Flow Rate**
Maximum 2.5 gpm (9.5 Lpm)
- ◆ **Rated Capacity**
15,000 gallons (56,781 L)
- ◆ **Pressure Requirements**
10 - 125 psi (0.7 - 8.6 bar), non-shock
- ◆ **Temperature**
35 - 100°F (2 - 38°C)
- ◆ **Overall Dimensions**
14.5" H x 3.25" D
(36.8 cm x 8.3 cm)



SYSTEM TESTED AND CERTIFIED BY NSF INTERNATIONAL AGAINST NSF/ ANSI STANDARDS 42 AND 53 FOR THE REDUCTION OF:

STANDARD NO. 42 – AESTHETIC EFFECTS Bacteriostatic Effects Chemical Reduction Taste & Odor Chlorine Mechanical Filtration Nominal Particulate Class I	STANDARD NO. 53 – HEALTH EFFECTS Mechanical Filtration Cyst Turbidity
--	--

EPA Est. No. 002623-IL-002

Pentair trademarks and logos are owned by Pentair plc or its affiliates. For a detailed list of where Pentair trademarks are registered, please visit www.pentair.com/en/registrations.html. Third party registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.

EV9692-21-27 MR20 ©2021 Pentair Filtration Solutions, LLC. All Rights Reserved.

www.pentair.eu