

AC² REPLACEMENT CARTRIDGE

DELIVERS PREMIUM QUALITY WATER FOR COLD CUP VENDING APPLICATIONS

AC² REPLACEMENT CARTRIDGE (1 pk):
EV960586



APPLICATIONS

- ◆ Cold Cup Vending
- ◆ OCA

FEATURES • BENEFITS

- ◆ Provides clear, fresh, premium quality ingredient water for great tasting drinking water and cold cup beverages
- ◆ Sanitary cartridge replacement is simple, quick and clean; internal filter parts are never exposed to handling or contamination
- ◆ Exclusive precoat filtration provides superior chlorine taste and odour reduction and micro-filters dirt and particles as small as 0.2* micron in size by mechanical means
- ◆ Proprietary Everpure Micro-Pure® II filtration media effectively inhibits the growth of bacteria on the filter media that can decrease product life
- ◆ Does not remove fluoride
- ◆ NSF/ANSI Standard 53 certified to reduce cysts such as Cryptosporidium and Giardia by mechanical means

INSTALLATION TIPS

- ◆ Never use saddle valve for connection
- ◆ Use 3/8" water line
- ◆ Install vertically with cartridge hanging down
- ◆ Allow 6.35 cm (2 1/2") clearance below the cartridge for easy cartridge replacement
- ◆ Flush AC2 cartridge by running water through filter for five (5) minutes at full flow.

OPERATION TIPS

- ◆ Replace cartridge when flow rate becomes inconveniently slow or before rated capacity is reached. It is recommended to replace cartridge at least once per year
- ◆ Change cartridges when capacity is reached or when pressure falls below 10 psi (0.7 bar)
- ◆ Service flow rate must not exceed 1.9 Lpm (0.5 gpm)
- ◆ Always flush the filter cartridge at time of installation and cartridge change.


* Validated by ISO 17025 accredited lab for 99.999% reduction of *Pseudomonas diminuta* following the ASTM F838-05 protocol for the validation of 0.2 µm sterilizing grade filters.

AC² REPLACEMENT CARTRIDGE

EV960586



AC² REPLACEMENT CARTRIDGE (1 pk):
EV960586

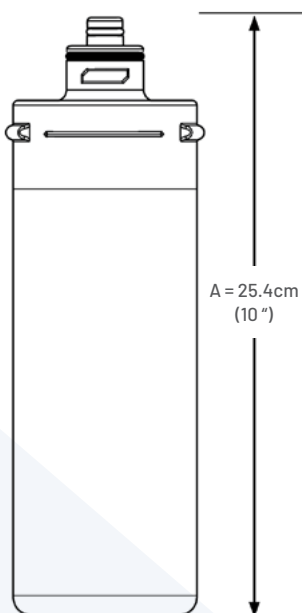

SPECIFICATIONS

- ◆ **Service Flow Rate**
Maximum 1.9 Lpm (0.5 gpm)
- ◆ **Rated Capacity**
5.678 litres (1.500 gallons)
- ◆ **Pressure Requirements**
10 - 125 psi (0.7 - 8.6 bar), non-shock
- ◆ **Temperature**
35 - 100°f (2 - 38°c)
- ◆ **Overall Dimensions**
25.4 cm L x 10.1 cm D (10" x 4")
- ◆ **Part number**
EV960586 - Single cartridge



System tested and Certified by NSF International
against NSF/ANSI

Standard 42 and 53 for the reduction of:

STANDARD NO. 42 – AESTHETIC EFFECTS	STANDARD NO. 53 – HEALTH EFFECTS
• Bacteriostatic Effects	• Mechanical Filtration
• Chemical Reduction (Taste & Odour, Chlorine)	• Cyst Reduction
• Mechanical Filtration (Nominal Particulate Class I)	

EPA Est. No. 002623-IL-002

Pentair trademarks and logos are owned by Pentair plc or its affiliates. For a detailed list of where Pentair trademarks are registered, please visit www.pentair.com/en/registrations.html. Third party registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.

EV960586 ©2022 Pentair Filtration Solutions, LLC. All Rights Reserved.

www.pentair.eu